

EMNİYETLİ MANUEL İRGAT / BRAKE WINCH

| | NL-BHW 800 | NL-BHW 1200 | NL-BHW 1800 | NL-BHW 2600 | |
|--|------------|-------------|-------------|-------------|----|
| Kapasite / Capacity | 360 | 550 | 800 | 1180 | kg |
| Gerekli el kuvveti / Required hand force | 20 | 14 | 22 | 10 | kg |
| Dişli oranı / Gear ratio | 4,1 : 1 | 4,1 : 1 | 5 : 1 | 10 : 1 | |
| İrgat göbek çapı / Hub diameter | 40 | 50 | 70 | 80 | mm |
| Kol uzunluğu / Handle length | 160 | 210 | 320 | 320 | mm |
| Halat çapı / Cable diameter | 4 | 4,8 | 6,4 | 8 | mm |
| Kablo muhafaza kapasitesi / Cable storage cap. | 36 | 23 | 24 | 18 | m |
| Birim ağırlığı / Unit weight | 3 | 3,3 | 8 | 10,3 | kg |


- Kompakt, hafif ve sağlam ürün yapısına sahiptir.
- Dişliler ve fren mekanizması, toz, kir ve yağmur atıklarından korumayı sağlamak üzere kapalı sistem tasarlanmıştır.
- Operatör ürünü kullanırken çok az enerji sarf eder.
- Üniversal montaj plakasına sahiptir.
- Renkli fırınlanmış emaye kaplama sayesinde korozyon dayanımını artırılmıştır.

- Positive load, actuated brake can hold the load in any position
- Compact, light-weight and rugged construction
- Gears and brake are fully covered to prevent dust, dirt and rain contamination
- Very low operator effort is required for easy operation
- Universal mounting base
- Baked yellow enamel paint finish for corrosion protection


| | |
|------------------|------------------|
| Art.No, 52000190 | NL-BHW 800 |
| Art.No, 52000127 | NL-BHW 1200 |
| Art.No, 52000128 | NL-BHW 1800 |
| Art.No, 52000191 | NL-BHW 2600 |
| Art.No, 52000192 | NL-BHW 800 PLUS |
| Art.No, 52000193 | NL-BHW 1200 PLUS |
| Art.No, 52000194 | NL-BHW 1800 PLUS |
| Art.No, 52000195 | NL-BHW 2600 PLUS |




NL- BHW 2600

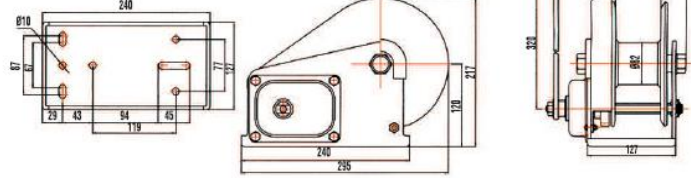

NL- BHW 1800

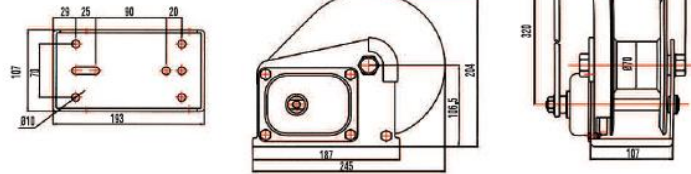

NL- BHW 1200

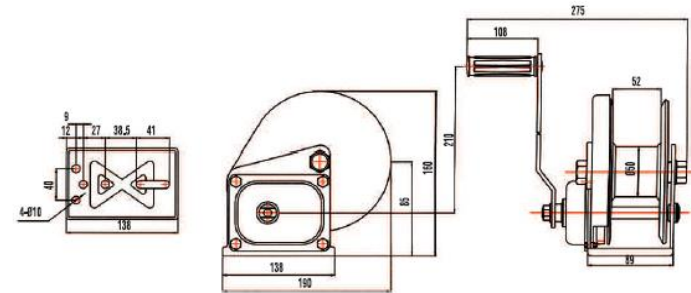

NL- BHW 800

