


## ZİNCİRLİ ŞARYO / GEARED TROLLEY

		NL-GT 0.5	NL-GT 1	NL-GT 2	NL-GT 3	NL-GT 5	NL-GT 10	NL-GT 20	
Kapasitesi / Capacity		0.5	1	2	3	5	10	20	t
Çalışma yüksekliği / Running height		2.5	2.5	2.5	3	3	3	3	m
Test yükü / Test load		7.35	14.71	29.42	44.13	61.29	122.58	245.7	kN
Min. radyus açısı / Min. radius of curve		0.8	0.9	1.0	1.2	1.3	2.0	3.5	m
Harcanan güç / Chain pull to lift full load		25	50	90	96	140	240	240	N
Ölçüler / Dimensions	A	272	336	350	358	373	52	98	mm
	B	194	236	268	322	362	424	555	mm
	C	176	208	247	295	342	396	498	mm
	H	95	111	134	157	185	190	233	mm
	F	1.5-3	1.5-3	1.5-3	2-3.5	2-3.5	2-3.5	2-3.5	mm
	S $\geq$	28	28	30	32	36	40	45	mm
Putrel ölçüsü / I-beam commended		50-152	64-203	88-203	100-203	114-203	124-305	136-305	mm
Ağırlık / Weight		9	13	18	29	42	94	174	kg

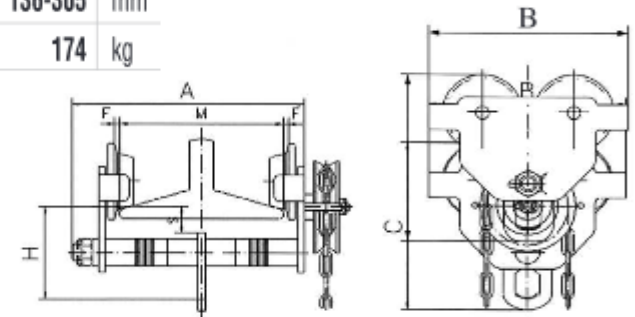

Art.No. 52000048 NL-GT 0.5

Art.No. 52000049 NL-GT 1

Art.No. 52000050 NL-GT 2

Art.No. 52000051 NL-GT 3

Art.No. 52000052 NL-GT 5

Art.No. 52000053 NL-GT 10

Art.No. 52000054 NL-GT 20

## NETLİFT GT MODEL ZİNCİRLİ ŞARYO CARASKAL ARABASI

Manuel kullanıma uygun modeldir ,